


# EN 1092-1 TYPE 01B PN16

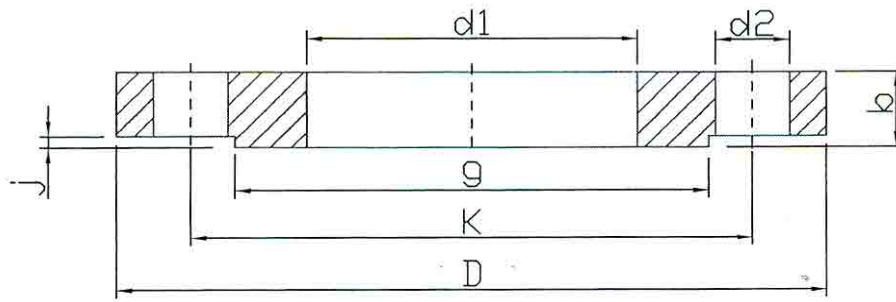

| DN  | pipe  | d1    | k   | D   | j | b  | g   | d2 | Thread | Number of drills | Weight kg |
|-----|-------|-------|-----|-----|---|----|-----|----|--------|------------------|-----------|
| 15  | 21,3  | 22,0  | 65  | 95  | 2 | 14 | 45  | 14 | M12    | 4                | 0,593     |
| 20  | 26,9  | 27,5  | 75  | 105 | 2 | 16 | 58  | 14 | M12    | 4                | 0,850     |
| 25  | 33,7  | 34,5  | 85  | 115 | 2 | 16 | 68  | 14 | M12    | 4                | 1,013     |
| 32  | 42,4  | 43,5  | 100 | 140 | 2 | 18 | 78  | 18 | M16    | 4                | 1,670     |
| 40  | 48,3  | 49,5  | 110 | 150 | 3 | 18 | 88  | 18 | M16    | 4                | 1,832     |
| 50  | 60,3  | 61,5  | 125 | 165 | 3 | 20 | 102 | 18 | M16    | 4                | 2,443     |
| 65  | 76,1  | 77,5  | 145 | 185 | 3 | 20 | 122 | 18 | M16    | 4                | 2,985     |
| 80  | 88,9  | 90,5  | 160 | 200 | 3 | 20 | 138 | 18 | M16    | 8                | 3,262     |
| 100 | 114,3 | 116,0 | 180 | 220 | 3 | 22 | 158 | 18 | M16    | 8                | 4,002     |
| 125 | 139,7 | 141,5 | 210 | 250 | 3 | 22 | 188 | 18 | M16    | 8                | 4,954     |
| 150 | 168,3 | 170,5 | 240 | 285 | 3 | 24 | 212 | 22 | M20    | 8                | 6,543     |
| 200 | 219,1 | 221,5 | 295 | 340 | 3 | 26 | 268 | 22 | M20    | 12               | 9,030     |
| 250 | 273,0 | 276,5 | 355 | 405 | 3 | 29 | 320 | 26 | M24    | 12               | 13,213    |
| 300 | 323,9 | 327,5 | 410 | 460 | 4 | 32 | 378 | 26 | M24    | 12               | 17,486    |
| 350 | 355,6 | 359,0 | 470 | 520 | 4 | 35 | 438 | 26 | M24    | 16               | 26,525    |
| 400 | 406,4 | 411,0 | 525 | 580 | 4 | 38 | 490 | 30 | M27    | 16               | 33,832    |
| 500 | 508,0 | 513,5 | 650 | 715 | 4 | 46 | 610 | 33 | M30    | 20               | 61,831    |