




Per eventuale gradino Tipo B vedi tabella a pag. 98

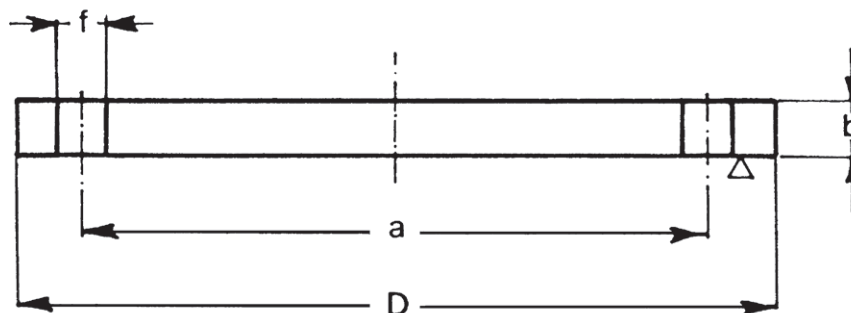

EN 1092-1

DN	D	b	f	a	VITI	N. FORI	Kg.
10	90	16	14	60	M12	4	1,0
15	95	16	14	65	M12	4	1,0
20	105	18	14	75	M12	4	1,0
25	115	18	14	85	M12	4	1,5
32	140	18	18	100	M16	4	2,0
40	150	18	18	110	M16	4	2,5
50	165	18	18	125	M16	4	3,0
65	185	18	18	145	M16	8	3,5
80	200	20	18	160	M16	8	4,5
100	220	20	18	180	M16	8	5,5
125	250	22	18	210	M16	8	8,0
150	285	22	22	240	M20	8	10,5
200	340	24	22	295	M20	8	16,5
250	395	26	22	350	M20	12	24,0
300	445	26	22	400	M20	12	31,0
350	505	26	22	460	M20	16	39,5
400	565	26	26	515	M24	16	49,5
450	615	28	26	565	M24	20	63,0
500	670	28	26	620	M24	20	75,5
600	780	34	30	725	M27	20	124,0
700	895	38	30	840	M27	24	182,5
800	1015	48	33	950	M30	24	297,0
900	1115	50	33	1050	M30	28	374,0
1000	1230	54	36	1160	M33	28	492,0
1200	1455	66	39	1380	M36	32	842,0
1400	1675	*	42	1590	M39	36	-
1600	1915	*	48	1820	M45	40	-
1800	2115	*	48	2020	M45	44	-
2000	2325	*	48	2230	M45	48	-

* Da specificare dal committente.