


Flange libere con anello d'appoggio da saldare a sovrapposizione PN. 16

Tipo 02 - Tipo 32

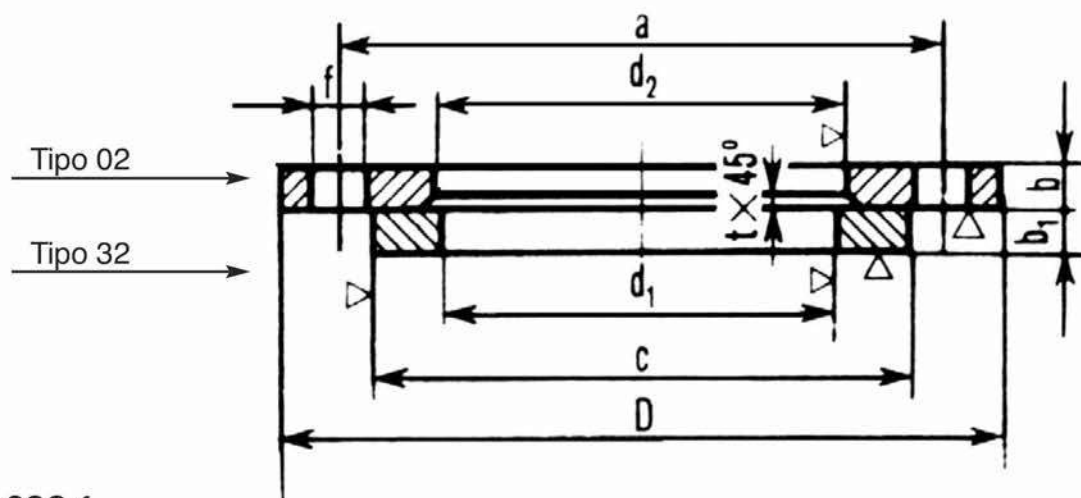

EN 1092-1

DN	Ø TUBO	FLANGIA LIBERA							VITI	ANELLO			Kg.	
		D	b	d ₂	t	a	f	FORI		b ₁	c	d ₁	FLANGE	ANELLO
10	17,2	90	14	21	3	60	14	4	M12	12	40	18,0	0,5	0,5
15	21,3	95	14	25	3	65	14	4	M12	12	45	22,0	0,5	0,5
20	26,9	105	16	31	4	75	14	4	M12	14	58	27,5	1,0	0,5
25	33,7	115	16	38	4	85	14	4	M12	14	68	34,5	1,0	0,5
32	42,4	140	18	47	5	100	18	4	M16	14	78	43,5	2,0	0,5
40	48,3	150	18	53	5	110	18	4	M16	14	88	49,5	2,0	0,5
50	60,3	165	20	65	5	125	18	4	M16	16	102	61,5	2,5	0,5
65	76,1	185	20	81	6	145	18	8	M16	16	122	77,5	3,0	1,0
80	88,9	200	20	94	6	160	18	8	M16	16	138	90,5	3,5	1,0
100	114,3	220	22	120	6	180	18	8	M16	18	158	116,0	4,5	1,5
125	139,7	250	22	145	6	210	18	8	M16	18	188	141,5	5,5	1,5
150	168,3	285	24	174	6	240	22	8	M20	20	212	170,5	7,0	2,0
200	219,1	340	26	226	6	295	22	12	M20	20	268	221,5	9,5	3,0
250	273,0	405	29	281	8	355	26	12	M24	22	320	276,5	14,0	3,5
300	323,9	460	32	333	8	410	26	12	M24	24	378	327,5	18,5	5,5
350	355,6	520	35	365	8	470	26	16	M24	26	438	359,5	27,5	10,0
400	406,4	580	38	416	8	525	30	16	M27	28	490	411,0	35,0	12,5
450	457,0	640	42	467	8	585	30	20	M27	30	550	462,0	45,0	16,5
500	508,0	715	46	519	8	650	33	20	M30	32	610	513,5	62,0	21,5
600	610,0	840	55	622	8	770	36	20	M33	32	725	616,5	99,0	28,5
700	711,0	910	63	*	8	840	36	24	M33	*	795	*		
800	813,0	1025	74	*	8	950	39	24	M36	*	900	*		
900	914,0	1125	82	*	8	1050	39	28	M36	*	1000	*		
1000	1016,0	1255	90	*	8	1170	42	28	M39	*	1115	*		

* Da specificare dal committente.