




Per eventuale gradino Tipo B vedi tabella a pag. 98

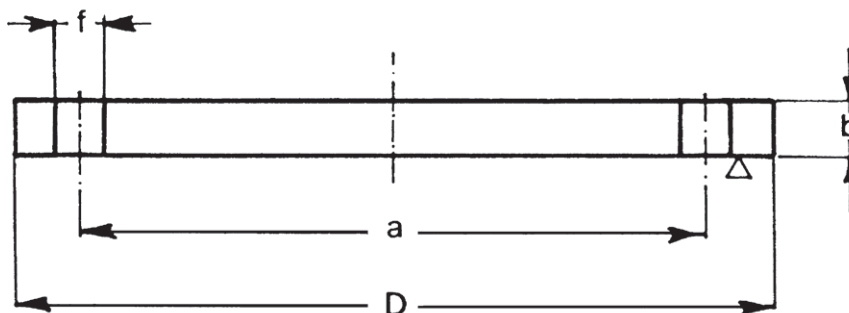

EN 1092-1

DN	D	b	f	a	VITI	N. FORI	Kg.
10	90	16	14	60	M12	4	1,0
15	95	16	14	65	M12	4	1,0
20	105	18	14	75	M12	4	1,0
25	115	18	14	85	M12	4	1,5
32	140	18	18	100	M16	4	2,0
40	150	18	18	110	M16	4	2,5
50	165	18	18	125	M16	4	3,0
65	185	18	18	145	M16	8	3,5
80	200	20	18	160	M16	8	4,5
100	220	20	18	180	M16	8	5,5
125	250	22	18	210	M16	8	8,0
150	285	22	22	240	M20	8	10,5
200	340	24	22	295	M20	12	16,5
250	405	26	26	355	M24	12	25,0
300	460	28	26	410	M24	12	35,0
350	520	30	26	470	M24	16	48,0
400	580	32	30	525	M27	16	63,5
450	640	40	30	585	M27	20	96,5
500	715	44	33	650	M30	20	133,0
600	840	54	36	770	M33	20	226,5
700	910	58	36	840	M33	24	285,0
800	1025	62	39	950	M36	24	388,0
900	1125	64	39	1050	M36	28	483,0
1000	1255	68	42	1170	M39	28	640,0
1200	1485	*	48	1390	M45	32	-
1400	1685	*	48	1590	M45	36	-
1600	1930	*	56	1820	M52	40	-
1800	2130	*	56	2020	M52	44	-
2000	2345	*	62	2230	M56	48	-

* Da specificare dal committente.