

ART. 430 VALVOLA DI RITEGNO A CLAPET FILETTATA

CERTIFICATI EN 10204/2.1

CARATTERISTICHE TECNICHE

1. Valvola di ritegno a clapet filettata
2. Acciaio inossidabile Aisi 316
3. Estremità filettate secondo EN 10226-1 (EX ISO 7-1 e DIN 2999)
4. Pressione massima 16 Kg/cm²
5. Temperatura massima d'esercizio 180 °C

ART. 430 SWING CHECK VALVE, THREADED ENDS

CERTIFICATES EN 10204/2.1


TECHNICAL INFORMATION

1. Swing check valve
2. Made by stainless steel Aisi 316
3. Threaded ends according EN 10226-1 (EX ISO 7-1 e DIN 2999)
4. Max. Working pressure 16 Kg / cm²
5. Max. working temperature 180 °C

DIMENSIONI GENERALI / GENERAL DIMENSIONS

Diametri Size	Codice Code	PN	Dimensioni / Dimensions (mm)		Peso/Weight (Kg)
			H	L	
1/2"	IV4301/2	16	44	65	0.31
3/4"	IV4303/4	16	53	80	0.49
1 "	IV4301	16	58	90	0.72
1 1/4"	IV43011/4	16	62	105	1.04
1 1/2"	IV43011/2	16	73	120	1.65
2 "	IV4302	16	78	141	2.39

CURVA PRESSIONE TEMPERATURA PRESSURE TEMPERATURE RATING

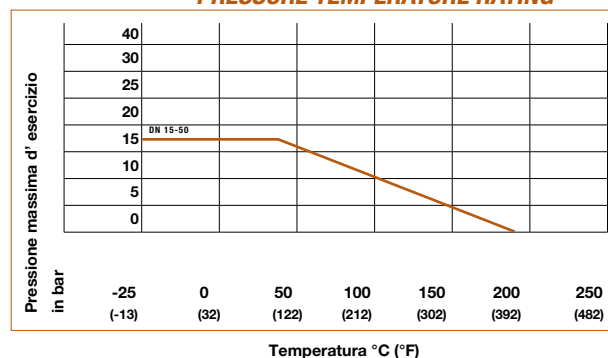

N°	Nome Name	Materiale Material	Finitura Surface Treatment
1	Corpo / Body	Inox Aisi 316	Sabbiata / Shot blasting
2	Coperchio / Cap	Inox Aisi 316	Sabbiata / Shot blasting
3	Disco / Disc	Inox 316	---
4	Guarnizione / Gasket	PTFE	---
5	Stelo / Stem	Inox Aisi 316	---

DIAGRAMMA PERDITE DI CARICO / HEAD LOSSES DIAGRAM

H2O-20 °C FLUSSO ORIZZONTALE / HORIZONTAL FLOW

